
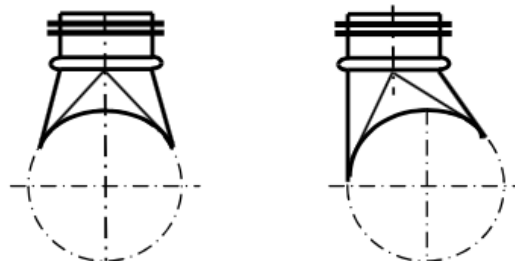


Speciale zadelstuk


OMSCHRIJVING

- Zadels, met kraag, gegalvaniseerd staal, rubberen pakking.
Ø d3 100 tot 1250
- Zadels, met kraag, zoals voorheen, tangentiële constructie.

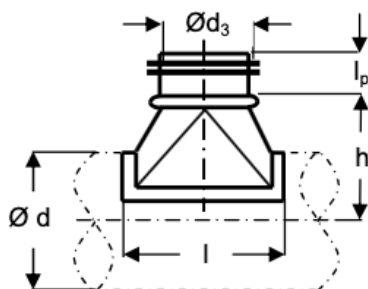


Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)
100	100	190	95	0.2
100	125	215	95	0.3
100	140	240	100	0.3
100	150	250	100	0.3
100	160	260	100	0.3
125	100	190	110	0.2
125	125	215	110	0.3
125	140	240	115	0.3
125	150	250	115	0.3
125	160	260	115	0.4
125	180	280	115	0.4
125	200	330	130	0.5
140	100	190	115	0.2
140	125	215	115	0.3
140	140	240	120	0.3
140	150	250	120	0.4
140	160	260	120	0.4
140	180	280	120	0.4
140	200	330	135	0.5
140	224	355	135	0.6
150	100	190	120	0.2
150	125	215	120	0.3
150	140	240	125	0.3
150	150	250	125	0.4
150	160	260	125	0.4
150	180	280	125	0.4
150	200	330	140	0.5
150	224	355	140	0.7
150	250	380	140	0.9
160	100	190	125	0.2

Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)
160	125	215	125	0.3
160	140	240	130	0.3
160	150	250	130	0.4
160	160	260	130	0.4
160	180	280	130	0.4
160	200	330	145	0.5
160	224	355	145	0.7
160	250	380	145	0.9
180	100	190	135	0.2
180	125	215	135	0.3
180	140	240	140	0.3
180	150	250	140	0.4
180	160	260	140	0.4
180	180	280	140	0.5
180	200	330	155	0.6
180	224	355	155	0.7
180	250	380	155	0.9
180	280	430	165	1.1
200	100	190	145	0.2
200	125	215	145	0.3
200	140	240	150	0.3
200	150	250	150	0.4
200	160	260	150	0.4
200	180	280	150	0.5
200	200	285	165	0.6
200	224	355	165	0.8
200	250	380	165	0.9
200	280	430	175	1.1
200	300	450	175	1.2
200	315	465	175	1.2




Speciale zadelstuk

Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)	Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)
100	100	190	95	0.2	160	125	215	125	0.3
100	125	215	95	0.3	160	140	240	130	0.3
100	140	240	100	0.3	160	150	250	130	0.4
100	150	250	100	0.3	160	160	260	130	0.4
100	160	260	100	0.3	160	180	280	130	0.4
125	100	190	110	0.2	160	200	330	145	0.5
125	125	215	110	0.3	160	224	355	145	0.7
125	140	240	115	0.3	160	250	380	145	0.9
125	150	250	115	0.3	180	100	190	135	0.2
125	160	260	115	0.4	180	125	215	135	0.3
125	180	280	115	0.4	180	140	240	140	0.3
125	200	330	130	0.5	180	150	250	140	0.4
140	100	190	115	0.2	180	160	260	140	0.4
140	125	215	115	0.3	180	180	280	140	0.5
140	140	240	120	0.3	180	200	330	155	0.6
140	150	250	120	0.4	180	224	355	155	0.7
140	160	260	120	0.4	180	250	380	155	0.9
140	180	280	120	0.4	180	280	430	165	1.1
140	200	330	135	0.5	200	100	190	145	0.2
140	224	355	135	0.6	200	125	215	145	0.3
150	100	190	120	0.2	200	140	240	150	0.3
150	125	215	120	0.3	200	150	250	150	0.4
150	140	240	125	0.3	200	160	260	150	0.4
150	150	250	125	0.4	200	180	280	150	0.5
150	160	260	125	0.4	200	200	285	165	0.6
150	180	280	125	0.4	200	224	355	165	0.8
150	200	330	140	0.5	200	250	380	165	0.9
150	224	355	140	0.7	200	280	430	175	1.1
150	250	380	140	0.9	200	300	450	175	1.2
160	100	190	125	0.2	200	315	465	175	1.2



Speciale zadelstuk

Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)	Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)
224	100	190	160	0.2	300	150	250	200	0.4
224	125	215	160	0.3	300	160	260	200	0.4
224	140	240	165	0.3	300	180	280	200	0.5
224	150	250	165	0.4	300	200	330	215	0.6
224	160	260	165	0.4	300	224	355	215	0.8
224	180	280	165	0.5	300	250	380	215	1.1
224	200	330	180	0.6	300	280	430	225	1.3
224	224	355	180	0.8	300	300	450	225	1.4
224	250	380	180	1.0	300	315	465	225	1.5
224	280	430	190	1.2	300	355	525	235	1.7
224	300	450	190	1.2	300	400	570	235	2.1
224	315	465	190	1.3	300	450	620	235	2.3
224	355	525	200	1.5	315	100	190	205	0.2
250	100	190	170	0.2	315	125	215	205	0.3
250	125	215	170	0.3	315	140	240	210	0.4
250	140	240	175	0.3	315	150	250	210	0.4
250	150	250	175	0.4	315	160	260	210	0.4
250	160	260	175	0.4	315	180	280	210	0.5
250	180	280	175	0.5	315	200	330	225	0.6
250	200	330	190	0.6	315	224	355	225	0.8
250	224	355	190	0.8	315	250	380	225	1.1
250	250	380	190	1.0	315	280	430	235	1.3
250	280	430	200	1.2	315	300	450	235	1.4
250	300	450	200	1.3	315	315	465	235	1.5
250	315	465	200	1.4	315	355	525	245	1.8
250	355	525	210	1.6	315	400	570	245	2.1
250	400	570	210	1.9	315	450	620	245	2.4
280	100	190	185	0.2	315	500	680	250	2.7
280	125	215	185	0.3	355	100	190	225	0.2
280	140	240	190	0.4	355	125	215	225	0.3
280	150	250	190	0.4	355	140	240	230	0.4
280	160	260	190	0.4	355	150	250	230	0.4
280	180	280	190	0.5	355	160	260	230	0.4
280	200	330	205	0.6	355	180	280	230	0.5
280	224	355	205	0.8	355	200	330	245	0.6
280	250	380	205	1.0	355	224	355	245	0.9
280	280	430	215	1.3	355	250	380	245	1.1
280	300	450	215	1.4	355	280	430	245	1.3
280	315	465	215	1.4	355	300	450	255	1.4
280	355	525	225	1.7	355	315	465	255	1.5
280	400	570	225	2.0	355	355	525	265	1.9
300	100	190	195	0.2	355	400	570	265	2.2
300	125	215	195	0.3	355	450	620	265	2.5
300	140	240	200	0.4	355	500	680	270	2.8
					355	560	740	270	3.2



Speciale zadelstuk


Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)
400	100	190	245	0.2
400	125	215	245	0.3
400	140	240	250	0.4
400	150	250	250	0.4
400	160	260	250	0.4
400	180	280	250	0.5
400	200	330	265	0.6
400	224	355	265	0.9
400	250	380	265	1.1
400	280	430	275	1.3
400	300	450	275	1.4
400	315	465	275	1.5
400	355	525	285	1.9
400	400	570	285	2.4
400	450	620	285	2.6
400	500	680	290	2.9
400	560	740	290	3.3
400	600	780	290	3.5
400	630	810	290	3.7
450	125	215	270	0.3
450	140	240	275	0.3
450	150	250	275	0.4
450	160	260	275	0.4
450	180	280	275	0.5
450	200	330	290	0.6
450	224	355	290	0.9
450	250	380	290	1.1
450	280	430	300	1.3
450	300	450	300	1.5
450	315	465	300	1.6
450	355	525	310	1.9
450	400	570	310	2.4
450	450	620	310	2.8
450	500	680	315	3.1
450	560	740	315	3.5
450	600	780	315	3.7
450	630	810	315	3.9
450	710	890	315	4.7
500	125	215	295	0.3
500	140	240	300	0.3
500	150	250	300	0.4
500	160	260	300	0.4
500	180	280	300	0.5
500	200	330	315	0.6
500	224	355	315	0.9

Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)
500	250	380	315	1.1
500	280	430	325	1.3
500	300	450	325	1.5
500	315	465	325	1.6
500	355	525	335	1.9
500	400	570	335	2.4
500	450	620	335	2.8
500	500	680	340	3.3
500	560	740	340	3.7
500	600	780	340	3.7
500	630	810	340	4.1
500	710	890	340	4.9
500	800	980	340	5.5
560	200	330	345	0.6
560	224	355	345	0.9
560	250	380	345	1.1
560	280	430	355	1.4
560	300	450	355	1.5
560	315	465	355	1.6
560	355	525	365	2.0
560	400	570	365	2.4
560	450	620	365	2.8
560	500	680	370	3.3
560	560	740	370	3.9
560	600	780	370	4.2
560	630	810	370	5.6
560	710	890	370	6.6
560	800	980	370	7.4
560	900	1080	370	8.5
600	200	330	365	0.6
600	224	355	365	0.9
600	250	380	365	1.1
600	280	430	375	1.4
600	300	450	375	1.5
600	315	465	375	1.6
600	355	525	385	2.0
600	400	570	385	2.4
600	450	620	385	2.8
600	500	680	390	3.4
600	560	740	390	3.9
600	600	780	390	4.3
600	630	810	390	5.8
600	710	890	390	6.8
600	800	980	390	7.7
600	900	1080	390	8.7



Speciale zadelstuk

Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)	Ød DN	Ød ₃ DN	l (mm)	h (mm)	Weight (kg)
630	200	330	380	0.6	800	710	890	490	7.6
630	224	355	380	0.8	800	800	980	490	9.0
630	250	380	380	1.1	800	900	1080	490	10.1
630	280	430	390	1.4	800	1000	1180	490	11.2
630	300	450	390	1.5	800	1120	1300	490	13.1
630	315	465	390	1.6	800	1250	1430	490	14.8
630	355	525	400	2.0	900	315	465	525	1.4
630	400	570	400	2.5	900	355	525	535	1.9
630	450	620	400	2.9	900	400	570	535	2.5
630	500	680	405	3.4	900	450	620	535	2.9
630	560	740	405	3.6	900	500	680	540	3.5
630	600	780	405	4.3	900	560	740	540	4.0
630	630	810	405	6.0	900	600	780	540	4.5
630	710	890	405	7.0	900	630	810	540	6.2
630	800	980	405	7.9	900	710	890	540	7.7
630	900	1080	405	8.9	900	800	980	540	8.5
630	1000	1180	405	10.0	900	900	1080	540	10.8
710	250	380	420	1.0	900	1000	1180	540	11.9
710	280	430	420	1.4	900	1120	1300	540	13.8
710	300	450	430	1.5	900	1250	1430	540	15.6
710	315	465	430	1.6	1000	315	465	575	1.4
710	355	525	440	2.0	1000	355	525	585	1.8
710	400	570	440	2.5	1000	400	570	585	2.4
710	450	620	440	2.9	1000	450	620	585	3.0
710	500	680	445	3.4	1000	500	680	590	3.5
710	560	740	445	4.0	1000	560	740	590	4.1
710	600	780	445	4.4	1000	600	780	590	4.5
710	630	810	445	6.0	1000	630	810	590	6.2
710	710	890	445	7.5	1000	710	890	590	7.4
710	800	980	445	8.4	1000	800	980	590	9.2
710	900	1080	445	9.4	1000	900	1080	590	10.9
710	1000	1180	445	10.5	1000	1000	1180	590	12.8
710	1120	1300	445	12.5	1000	1120	1300	590	14.7
800	250	380	465	1.0	1000	1250	1430	590	16.4
800	280	430	475	1.3	1120	500	680	650	3.5
800	300	450	475	1.4	1120	560	740	650	4.1
800	315	465	475	1.5	1120	600	780	650	4.5
800	355	525	485	2.0	1120	630	810	650	6.3
800	400	570	485	2.5	1120	710	890	650	7.8
800	450	620	485	2.9	1120	800	980	650	9.3
800	500	680	490	3.4	1120	900	1080	650	11.0
800	560	740	490	4.0	1120	1000	1180	650	12.9
800	600	780	490	4.4	1120	1120	1300	650	15.9
800	630	810	490	6.1	1120	1250	1430	650	17.6



Speciale zadelstuk

Ød DN	Ød3 DN	l (mm)	h (mm)	Weight (kg)
1250	500	680	715	3.1
1250	560	740	715	4.1
1250	600	780	715	4.6
1250	630	810	715	6.3
1250	710	890	715	7.8
1250	800	980	715	9.3
1250	900	1080	715	11.1
1250	1000	1180	715	13.0
1250	1120	1300	715	16.1
1250	1250	1430	715	19.0