



ECOM90EC



Ventilation unit with very high efficiency air-to-air heat recovery

RANGE

ECOM90EC line consists of 7 models, from 300 m³/h up to 5.400 m³/h. Also available in many arrangements. The high static pressures allow the assembling of canalizations to extract or intake air in many ambients.

CONSTRUCTION

- Self-carrying frame (sizes 50-400) or with aluminium profiles (size 500), with sandwich panels with thickness 25 mm (sizes 50-400) or 42 mm (size 500), made from galvanized steel sheet (inner side) and pre-coated steel sheet RAL 9002 (outer side).
- Non-flammable mineral wool thermal and acoustic insulation
- Very high efficiency counterflow heat recovery, aluminium heat exchanger plates with supplementary sealing and built-in motorized by-pass device; aluminium drain pan, fitted with 1/2" M condensation outlet (on side for horizontal unit, on bottom for vertical unit)
- Compact filters at both intakes with synthetic (external layers) and micro-glass (intermediate layer) media and galvanized steel frame, ISO ePM10 50% efficiency class on return air, ISO ePM1 50% efficiency class on fresh air, easily removable from bottom and side panels; efficiency according to ISO 16890.
- Air filter pressure switches wired to the unit control panel for air filter clogging control.
- Direct driven EC motor plug fans; plastic fiberglass-reinforced impeller or aluminium
- Built-in electric box with electronic controller for a complete control of all typical functions of the unit; in particular :
 - manual control of EC fan motors
 - automatic control of EC fan motors (by pressure, temperature or air quality sensor)
 - heating/cooling water valve modulating control
 - electric heater on/off control (both pre and re-heater)
 - heat recovery defrost control
 - free-cooling on/off mode control
 - post-ventilation
 - weekly programming
 - alarm management and dirty filter warning
 - remote on/off
 - remote Summer/Winter mode
 - EC fan motors management by fire alarm digital input
 - BMS by Modbus protocol and RS485 connection

TECHNICAL SPECIFICATIONS

- Conveyed air: clean
- Voltage:
 - Mono-phase version (M) 230V-50Hz. (mod.50 -100 -150 - 200)
 - Three phase version (T) 400V-50Hz. (mod. 300 - 400 - 500)

ACCESSORIES

- BE: Electric heater
- SEW: Water heating/cooling external section
- 3W: 3-way modulating valve
- SR: Adjusting damper
- SSR: Damper actuator
- GA: Flexible connection
- AC: Round connection
- SPD: Differential pressure transducer
- AQS: Ductable CO2 transducer
- RC: Roof covers

ON REQUEST

- ECOM90EC-V: Versione verticale



Warmteterugwinningsunit ECOM90ec

Technical data

VENTILATION			50	100	150	200	300	400	500
Airflow rate	Nom	m ³ /h m ³ /s	380 0,106	720 0,200	1130 0,314	1710 0,475	2460 0,683	3300 0,917	4500 1,25
External static pressure ⁽¹⁾	Nom	Pa	300	205	220	250	220	270	470
1m sound pressure level	Nom	dB(A)	54	53	51	59	59	60	64
Overall power input	Nom	W	340	340	730	930	1650	1920	3050
	Max		340	340	920	930	2000	2000	4850
Overall input current	Nom	A	2,8	2,9	5,0	6,0	2,9	3,4	4,8
	Max		2,8	2,9	6,0	6,0	3,4	3,5	7,6
Power supply		V-Ph-Hz	230-1-50	230-1-50	230-1-50	230-1-50	400-3+N-50	400-3+N-50	400-3+N-50
Fan speed control		-	0÷10V						
External leakage			max 3,5% @ - 400 Pa (EN 13141-7)						
Internal leakage		%	max 5,5% @ +250 Pa (EN 13141-7)						
Yearly filter energy consumption ⁽⁵⁾		kWh	420	670	1200	1700	2085	2787	3180

HEAT RECOVERY ⁽²⁾		50	100	150	200	300	400	500
Recovery efficiency	%	92,1	91,7	91,7	91,5	90,7	90,8	89,4
Recovery capacity	W	3490	6570	10450	15600	22280	29920	35200
Supply temperature	°C	17,6	17,5	17,5	17,5	17,2	17,2	17,1

CONFORMITY TO EU 1253/2014		50	100	150	200	300	400	500
Recovery efficiency ⁽³⁾	%	83,8	82,8	82,4	82,0	81,4	81,5	82,9
Efficiency bonus	W/m ³ /s	324	294	282	270	252	255	297
Filter correction factor	-	0	0	0	0	0	0	0
SFP int limit	W/m ³ /s	1408	1364	1335	1299	1249	1217	1209
Total internal air pressure drop ⁽³⁾	Pa	621	699	645	595	702	718	615
Overall fan static efficiency ⁽⁴⁾	%	44,3	53,7	48,9	50,3	57,6	59,2	62,0
SFP int	W/m ³ /s	1403	1301	1319	1183	1219	1213	992

WORKING LIMITS		50	100	150	200	300	400	500
Air temperature	°C	-20 ÷ 45						
Air relative humidity	%	10 ÷ 95						
Working environment	-	Not explosive, not corrosive, not chlorinated, not saline						

(1) fresh air/supply air circuit

(2) at wet conditions : outside air temperature -10°C 90% RH, room air temperature 20°C 60% RH

(3) at dry conditions : outside air temperature 5°C, room air temperature 25°C








(4) including motor & speed controller efficiency

(5) based on 6000 operating hours per year at nominal airflow rate, at fan efficiency (4) and on 150 Pa max air filter pressure drop before replacing (both M5 and F7 filter)



Warmteterugwinningsunit ECOM90ec

Performances I

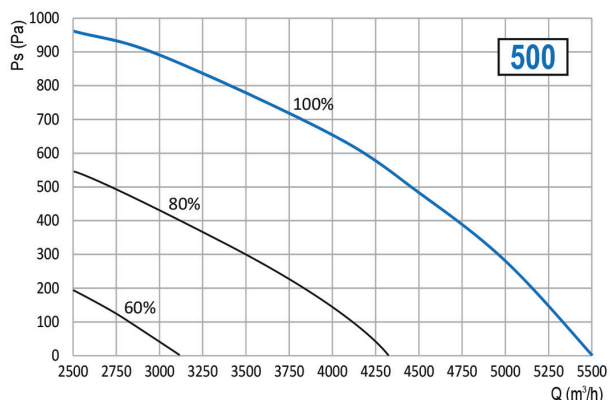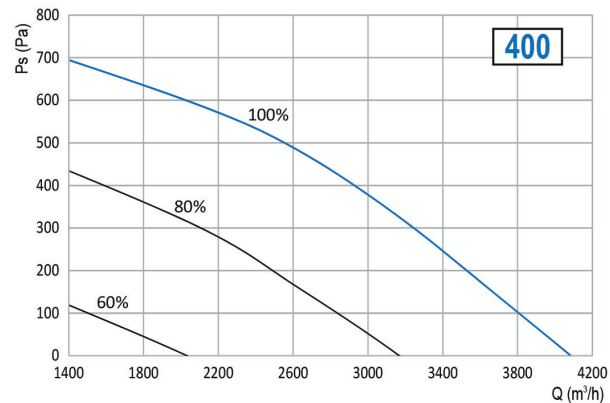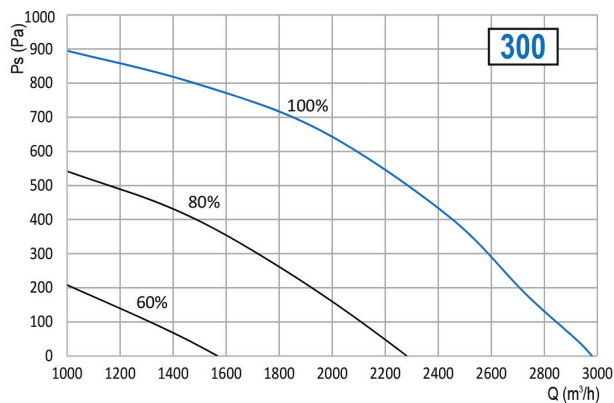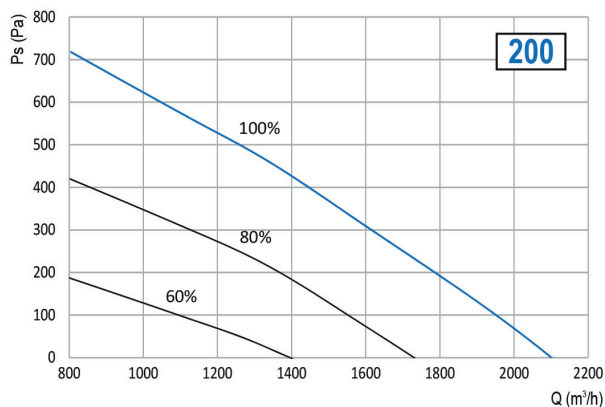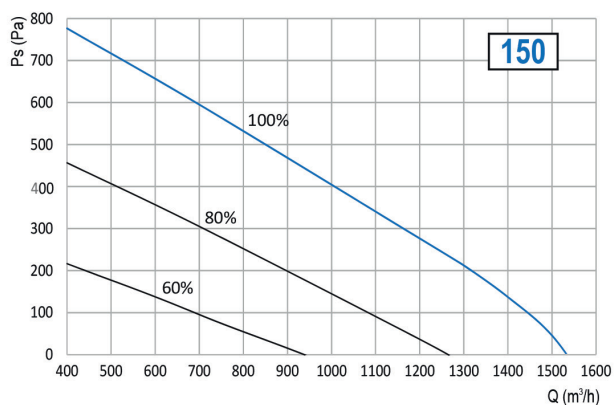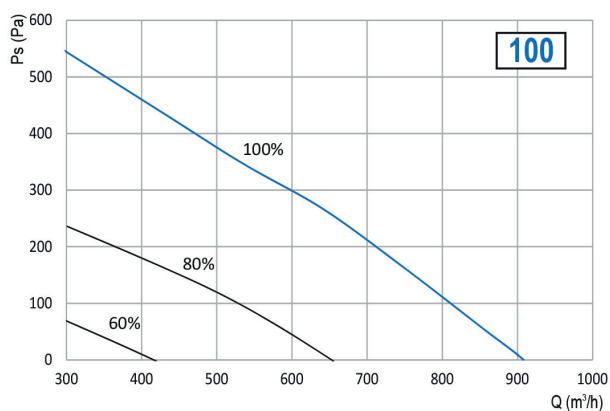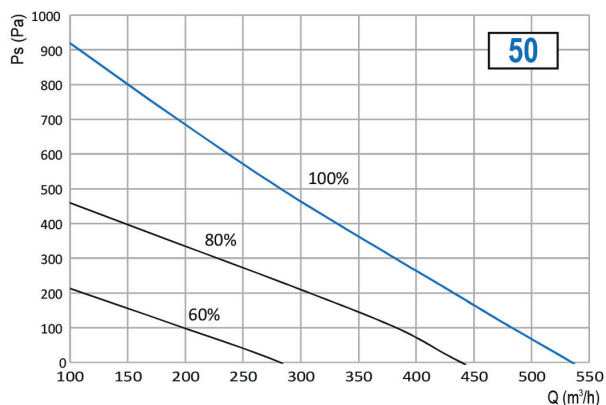




Warmteterugwinningsunit ECOM90ec


Noise level

Referring to nominal working conditions, the following table shows the sound power level (SWL) per octave band and total; it also shows the sound pressure level (SPL) at 1m, 5m and 10m on supply air, return air and outside the unit connected to air ducts.

model	SWL [dB] per octave band [Hz]								SWL		Supply SPL			Return SPL			Outside SPL		
	63	125	250	500	1000	2000	4000	8000	dB	dB(A)	1 m	5 m	10 m	1 m	5 m	10 m	1 m	5 m	10 m
	dB(A)																		
50	62	59	65	65	63	63	62	53	72	69	61	47	41	53	39	33	44	30	24
100	61	58	64	64	62	62	61	53	71	68	60	47	41	53	39	33	44	30	24
150	60	59	65	65	63	63	63	55	72	70	61	48	42	54	40	32	45	31	25
200	66	64	74	73	69	68	68	67	79	76	68	54	48	60	46	40	51	37	31
300	69	66	74	76	72	71	67	67	80	77	69	55	49	61	47	41	52	38	32
400	68	69	72	73	69	70	66	65	79	76	68	54	48	60	46	40	51	37	31
500	70	68	80	75	70	70	67	70	83	79	72	58	52	64	50	44	55	41	35

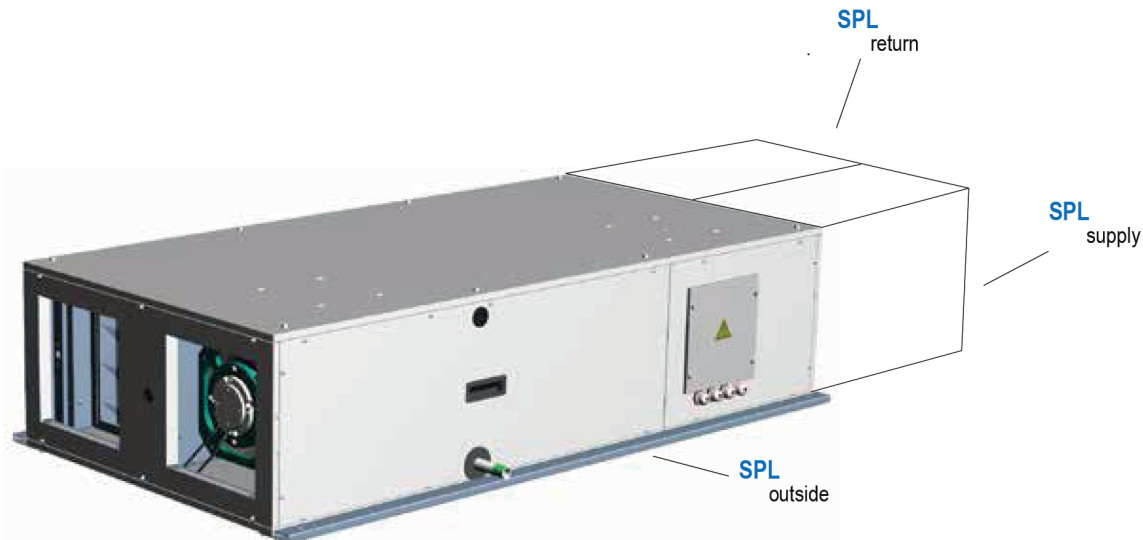

Spare parts

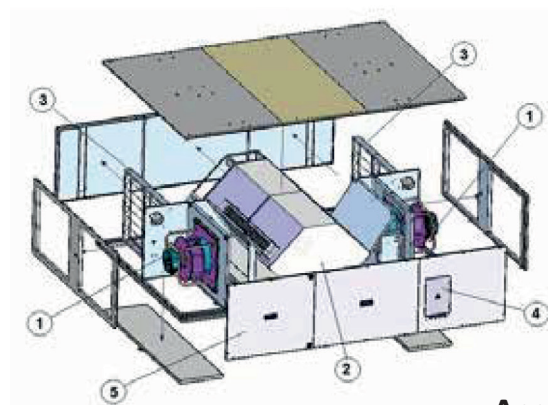

- 1 – Supply and exhaust EC fan
- 2 – motorizzato integrato - High efficiency air-to-air heat recovery with built-in motorized by-pass device
- 3 – Air filter close to air inlet (class efficiency: F7 on fresh air, M5 on return air)
- 4 – Built-in electric box complete with controller (and remote user interface)
- 5 – Self-supporting panels

Accessories

BE: Electric heater

SEW: Water heating/cooling external section

3W: 3-way modulating valve

SR: Adjusting damper

SSR: Damper actuator

GA: Flexible connection

AC: Round connection

SPD: Differential pressure transduce

AQS: Ductable CO2 transducer

RC: Roof covers




Warmteterugwinningsunit ECOM90ec



Dimensions

ECOM90EC


Horizontal unit

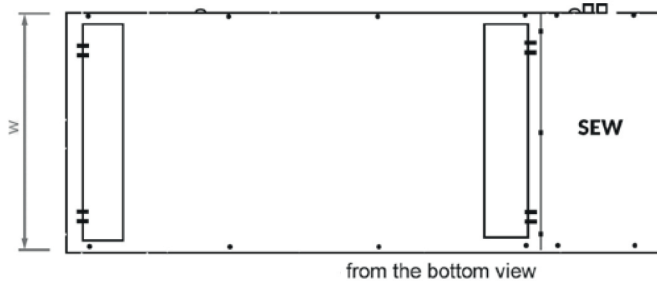

SEW: accessory

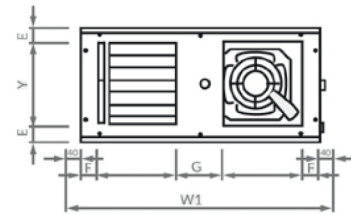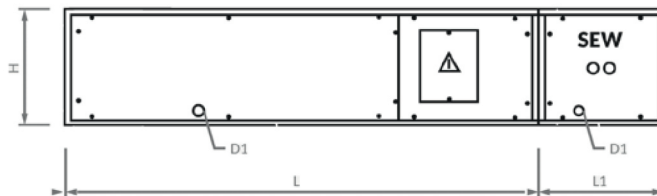

Model	50	100	150	200	300	400	500
L	1350	1470	1850	1850	2150	2150	2350
W	680	820	1030	1460	1460	1840	1900
H	330	370	455	455	590	590	800
W1	760	900	1110	1540	1540	1920	1980
X	230	300	390	600	590	780	800
Y	225	265	350	350	485	485	720
E	52,5	52,5	52,5	52,5	52,5	52,5	40
F	46	46	46	46	55	55	40
G	128	130	158	170	170	170	220
D1	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M
D2	3/4" M	3/4" M	3/4" M	3/4" M	1" M	1" M	1" M
L1	350	400	400	400	502	502	535
Peso / Weight ⁽¹⁾ Kg	86	106	181	236	297	367	520

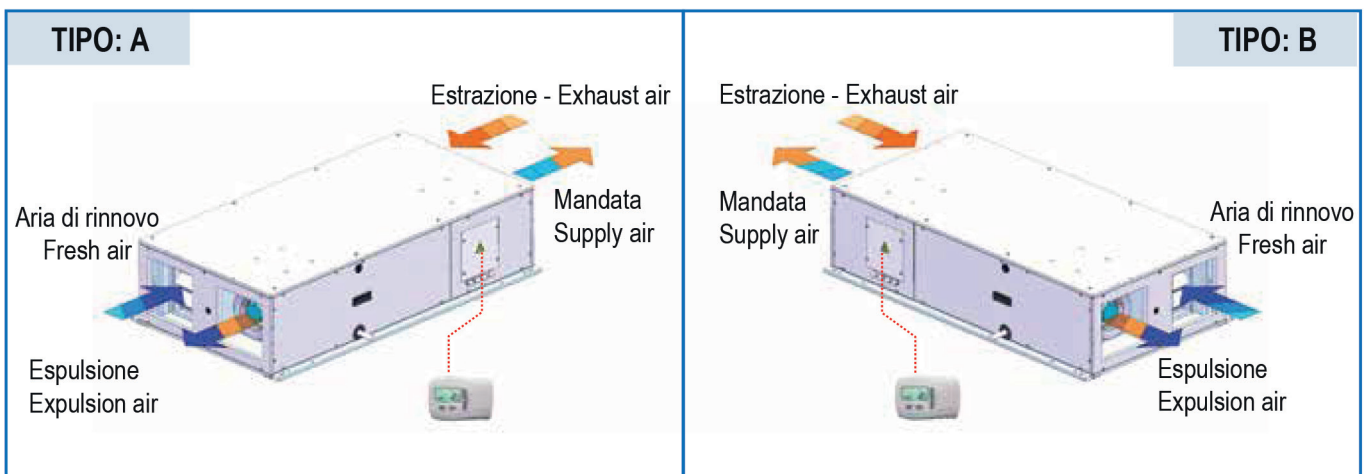




Warmteterugwinningsunit ECOM90ec

Dimensions

ECOM90EC V

Vertical unit

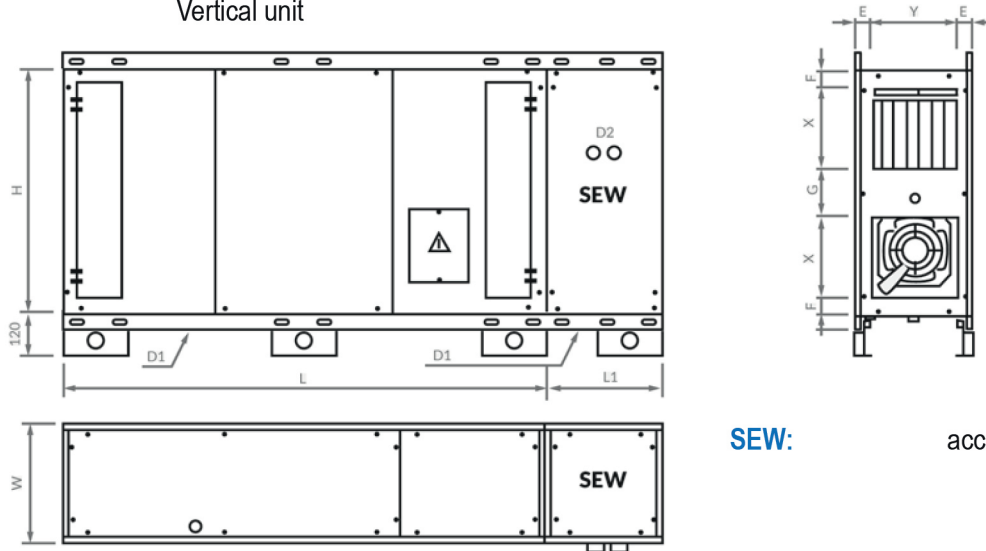

SEW: accessory

Model	50	100	150	200	300	400	500
L	1350	1470	1850	1850	2150	2150	2350
W	330	370	455	455	590	590	800
H	680	820	1030	1460	1460	1840	1900
X	230	300	390	600	590	780	800
Y	225	265	350	350	485	485	720
E	52,5	52,5	52,5	52,5	52,5	52,5	40
F	46	46	46	46	55	55	40
G	128	130	158	170	170	170	220
D1	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M
D2	3/4" M	3/4" M	3/4" M	3/4" M	1" M	1" M	1" M
L1	350	400	400	400	502	502	535
Peso / Weight ⁽¹⁾ Kg	86	106	181	236	297	367	520

Arrangements

